

0563 Series

■ PLUG HOUSING



• Part No.: 0563-SDxx

Specifications

- Electrical
- Voltage Rating: 100V AC/ DC
- Current Rating: 0.8A AC/ DC
- Withstanding Voltage: 150V AC/ minute
- Insulation Resistance: 100M Ω Min
- Contact Resistance: 80m Ω Max

Material

- Circuits: 30, 40
- Housing: LCP UL 94V-0
- Shield: Copper Alloy, Gold plated
- Contact: Copper Alloy, Gold plated
- Temperature Range: -25~+85°C


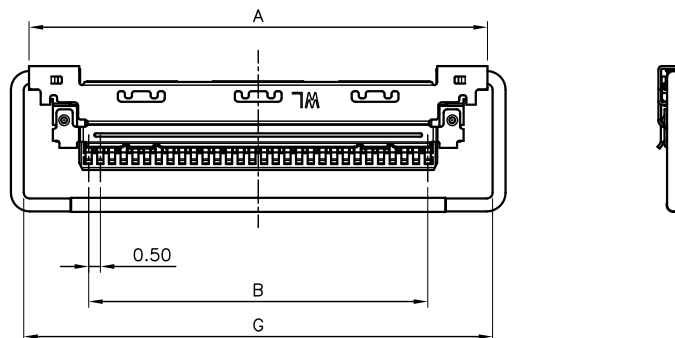


■ TOP COVER

• Part No.: 0563-CVxx

Material

- Circuits: 30, 40
- Material: Copper Alloy
- Thickness: 0.12mm
- Plating: Gold plated
- Accepts housing: 0563-SDxx



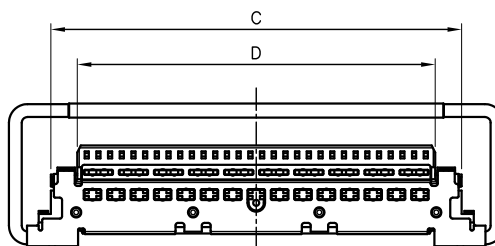


■ PLUG PULL BAR

• Part No.: 0563-PBxx

Material

- Circuits: 30, 40
- Material: SUS, $\varnothing$ 0.55
- Accepts housing: 0563-SDxx

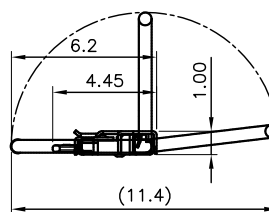

PULL BAR MOVEMENTS

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION						
		A	B	C	D	E	F	G
30	0563-SD30-xx	16.30	14.50	19.50	21.25	15.60	19.30	23.20
40	0563-SD40-xx	21.30	19.50	24.50	26.25	20.60	24.30	28.20