

0.60mm .024" Center Wire to Board Connector



0600 Series

■ PLUG HOUSING



- Part No.: 0600-H-xxP

Specifications

- Electrical
- Voltage Rating: 30V(AC, DC)
- Current Rating: 0.3A AC/ DC(AWG#34)
0.2A AC/ DC(AWG#36)
- Withstanding Voltage: 200V AC/ minute
- Insulation Resistance: 100MΩ Min
- Contact Resistance: 40mΩ Max
- Insulation O.D: 0.29mm(AWG#36)
0.32mm(AWG#34)
- Applicable Wire: AWG#36, AWG#34

Material

- Circuits: 6
- Housing: LCP, UL 94V-0
- Terminal: Phosphor bronze, Tin plated
Gold plated
- Temperature Range: -25~+85°C

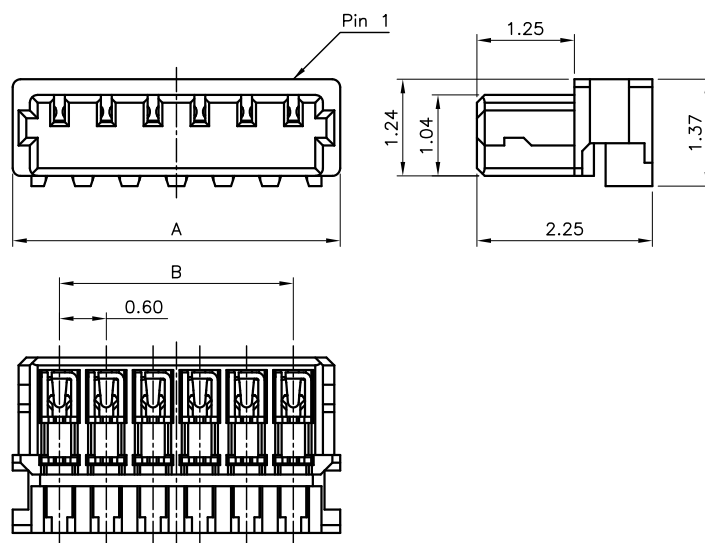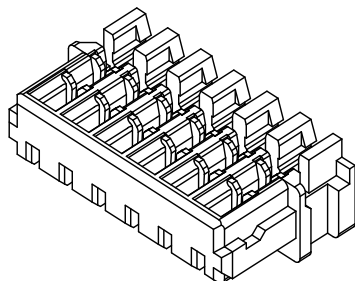

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	0600-H-02P	1.80	0.60
4	0600-H-04P	3.00	1.80
5	0600-H-05P	3.60	2.40
6	0600-H-06P	4.20	3.00
8	0600-H-08P	5.40	4.20
10	0600-H-10P	6.60	5.40
12	0600-H-12P	7.80	6.60

0601 Series

■ PLUG HOUSING



- Part No.: 0601-H-xxP

Specifications

- Electrical
- Voltage Rating: 30V(AC, DC)
- Current Rating: 0.3A AC/ DC(AWG#34)
0.2A AC/ DC(AWG#36)
- Contact Resistance: 40mΩ Max
- Withstanding Voltage: 200V AC/ minute
- Insulation Resistance: 100MΩ Min
- Insulation O.D: 0.29mm(AWG#36)
0.32mm(AWG#34)
- Applicable Wire: AWG#36, AWG#34

Material

- Circuits: 6
- Housing: LCP, UL 94V-0
- Terminal: Phosphor bronze, Tin plated
Gold plated
- Temperature Range: -25~+85°C

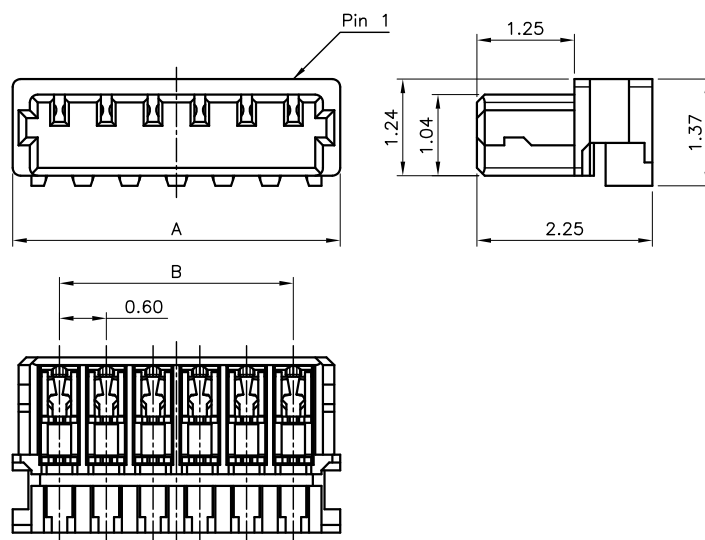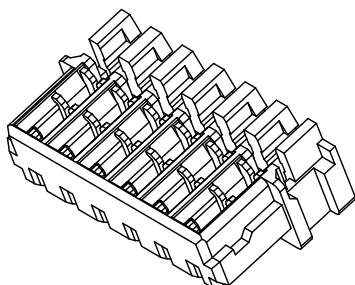

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	0601-H-02P	1.80	0.60
4	0601-H-04P	3.00	1.80
5	0601-H-05P	3.60	2.40
6	0601-H-06P	4.20	3.00
8	0601-H-08P	5.40	4.20
10	0601-H-10P	6.60	5.40
12	0601-H-12P	7.80	6.60