

0.80mm .032" Center Wire to Board Connector



1223 Series

■ PLUG HOUSING








- Part No.: 1223-H-xxP

Specifications

- Electrical
- Voltage Rating: 30V(DC)
- Current Rating: 0.5A AC/ DC
- Withstanding Voltage: 250V AC/ minute
- Insulation Resistance: 100M Ω Min
- Contact Resistance: 30m Ω Max
- Insulation O.D: 0.38mm(AWG#32)
- Applicable Wire: AWG#32

Material

- Circuits: 2~8
- Housing: Thermal Plastic, UL 94V-0
- Color : Black
- Contact: Phosphor bronze
- Plating: Gold plated
- Temperature Range: -25~+85°C

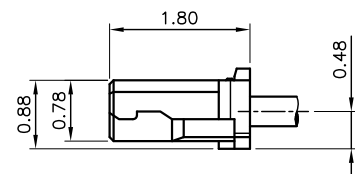

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION		
		A	B	C
2	1223-H-02P	0.80	3.05	2.15
3	1223-H-03P	1.60	3.85	2.95
4	1223-H-04P	2.40	4.65	3.75
5	1223-H-05P	3.20	5.45	4.55
6	1223-H-06P	4.00	6.25	5.35
7	1223-H-07P	4.80	7.05	6.15
8	1223-H-08P	5.60	7.85	6.95