




1.00mm .039" Center Wire to Board Connector



1058 Series

■ TERMINAL

- Part No.: 1058-G-P-E (簡易型)
- Material: Phos. bronze
- Thickness: 0.15mm
- Plating: Gold plated
- Wire Range: Suitable for AWG#28~32
- Insulation O.D.: 0.75mm (max)
- Q'TY: 15,000 pcs/reel
- Accepts housing : 1058-H-20P
1058-H-30P
1058-HNA-30P
1058-HL-30P
1058-EH-30P
1058-EHL-30P

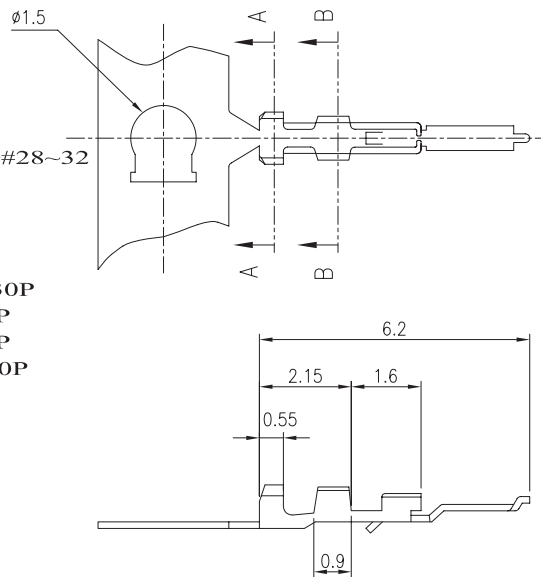





Ordering Information

Part No.	Wire Range	Insulation O.D.	Material	Finish	Q'ty/reel	Note
1058-G-P-E	AWG #28~#32	0.80mm (max)	Phos. bronze	Gold Plated	15,000 pcs	簡易型

1058 Series

■ TERMINAL

- Part No.: 1058-G-P (一般型)
- Material: Phos. bronze
- Thickness: 0.15mm
- Plating: Gold plated
- Wire Range: Suitable for AWG#28~32
- Insulation O.D.: 0.75mm (max)
- Q'TY: 15,000 pcs/reel
- Accepts housing : 1058-H-20P
1058-H-30P
1058-HNA-30P
1058-HL-30P
1058-EH-30P
1058-EHL-30P

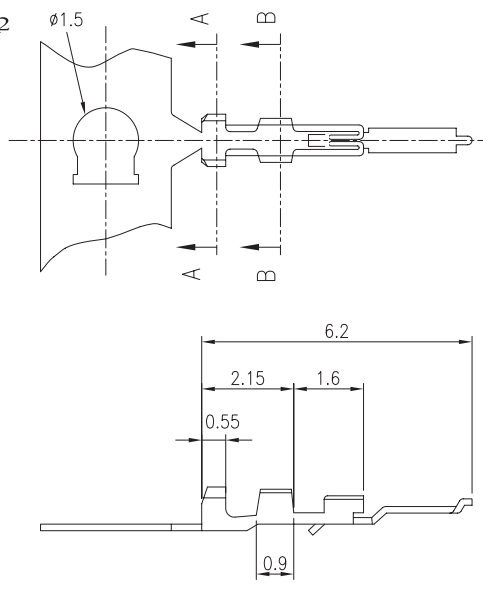

Ordering Information

Part No.	Wire Range	Insulation O.D.	Material	Finish	Q'ty/reel	Note
1058-G-P	AWG #28~#32	0.80mm (max)	Phos. bronze	Gold Plated	15,000 pcs	一般型



1.00mm .039" Center Wire to Board Connector



1058 Series

■ HOUSING

- Part No.: 1058-HL-30P
- Material:
 - Housing : Nylon 46, UL94-V0
 - Shell : Copper alloy/Nickel plated
 - Lock spring: Stainless steel
- Pitch: 1.0mm (.039")
- Poles: 30
- Q'TY: 100 pcs/box
- Accepts Terminal : 1058-G-P, 1058-G-P-E
- Mates with : 1058-HL-SMTR-30P

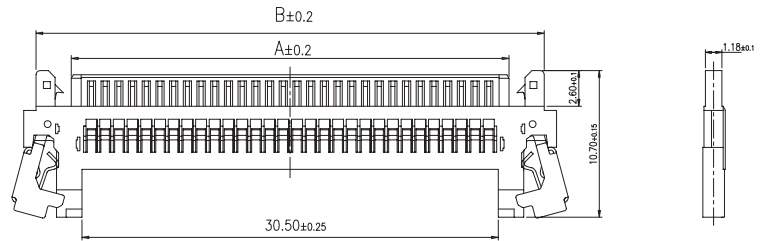

SGS
E186792 CE / 2008

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
30	1058-HL-30P	31.92	37.06


1058 Series

■ WAFER

- Part No.: 1058-HL-SMTR-30P
- Material:
 - Housing: Thermoplastic, High Temp,
 - Color: Natural
 - Contact: Copper Alloy
- Contact: Gold Flash over all.
50u" Min Nickel Underplating Over All.
- Shell:
 - 100u" Min. Tin Plating on solder tails.
 - 50u" Min. Nickel Underplating on solder tails.
 - Reflow solder capable to 260°C
- Mates with : 1058-HL-30P

■ SPECIFICATIONS

- Rated Voltage: 200V AC,DC
- Rated Current: AC, DC 1A each / terminal
- Withstand Voltage: 500V AC/minute
- Contact Resistance: 40m Ohm max.
- Insulation Resistance: 100M Ohm min
- Temperature Range: -40°C ~ 80°C

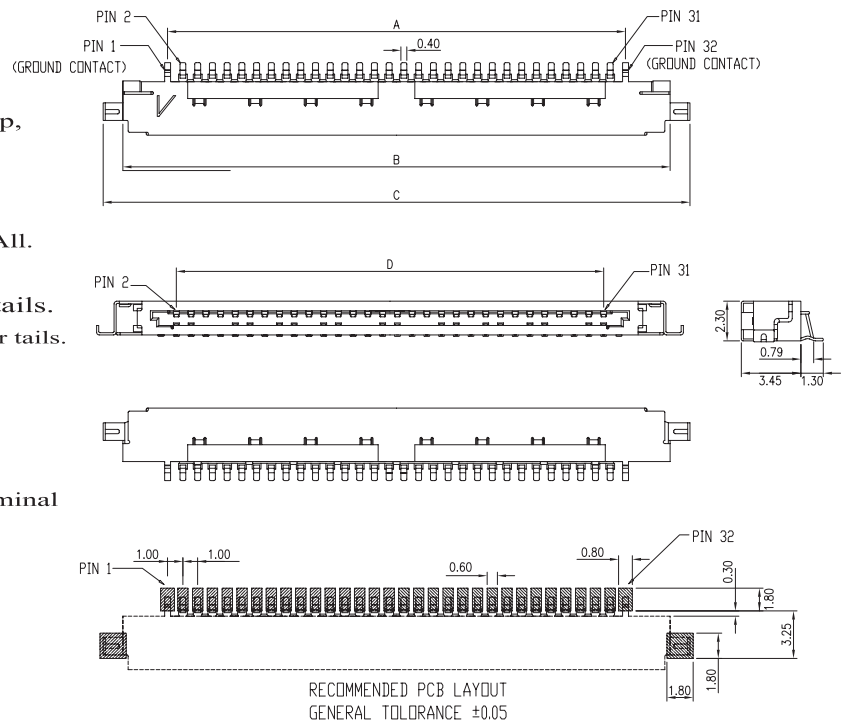

SGS
E186792 CE / 2008

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION			
		A	B	C	D
30	1058-HL-SMTR-30P	31.00	37.35	40.05	29.00

TEL: 886-2-2912-0863 886-2-2916-1137 FAX: 886-2914-2702 E-mail: wl@well-lin.com.tw