

2.0mm .079" Center Wire to Board Connector



2000 Series

■ WAFER




- Part No.: 2000-WS-xxP

Specifications



- Electrical
- Voltage Rating: 100V AC,DC
- Current Rating: 2A
- Withstanding Voltage: 800V AC/ minute
- Insulation Resistance: 1000M Ω Min
- Mates with: 2000-H-xxP

Material

- Circuits: 2~15
- Housing: Nylon 66, UL 94V-2
- Pin: Brass, Tin plated
- Temperature Range: -25~+85°C



PCB PATTREN LAYOUT

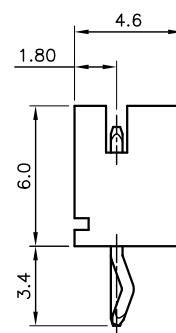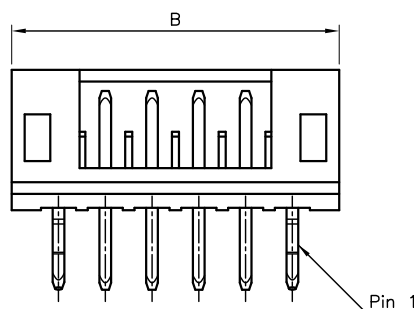

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	2000-WS-02P	2.00	6.0
3	2000-WS-03P	4.00	8.0
4	2000-WS-04P	6.00	10.0
5	2000-WS-05P	8.00	12.0
6	2000-WS-06P	10.00	14.0
7	2000-WS-07P	12.00	16.0
8	2000-WS-08P	14.00	18.0

CIRCUITS	PART NO.	DIMENSION	
		A	B
9	2000-WS-09P	16.00	20.0
10	2000-WS-10P	18.00	22.0
11	2000-WS-11P	20.00	24.0
12	2000-WS-12P	22.00	26.0
13	2000-WS-13P	24.00	28.0
14	2000-WS-14P	26.00	30.0
15	2000-WS-15P	28.00	32.0

2000 Series

■ WAFER




- Part No.: 2000-WR-xxP

Specifications



- Electrical
- Voltage Rating: 100V AC,DC
- Current Rating: 2A
- Withstanding Voltage: 800V AC/ minute
- Insulation Resistance: 1000M Ω Min
- Mates with: 2000-H-xxP

Material

- Circuits: 2~15
- Housing: Nylon 66, UL 94V-2
- Pin: Brass, Tin plated
- Temperature Range: -25~+85°C



PCB PATTREN LAYOUT

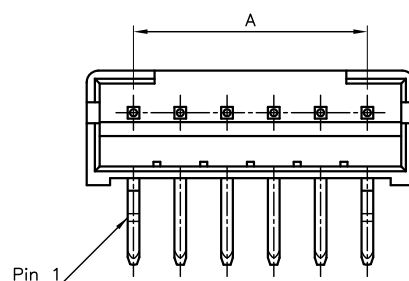

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	2000-WR-02P	2.00	6.0
3	2000-WR-03P	4.00	8.0
4	2000-WR-04P	6.00	10.0
5	2000-WR-05P	8.00	12.0
6	2000-WR-06P	10.00	14.0
7	2000-WR-07P	12.00	16.0
8	2000-WR-08P	14.00	18.0

CIRCUITS	PART NO.	DIMENSION	
		A	B
9	2000-WR-09P	16.00	20.0
10	2000-WR-10P	18.00	22.0
11	2000-WR-11P	20.00	24.0
12	2000-WR-12P	22.00	26.0
13	2000-WR-13P	24.00	28.0
14	2000-WR-14P	26.00	30.0
15	2000-WR-15P	28.00	32.0

2.0mm .079" Center Wire to Board Connector



2000 Series

■ WAFER






- Part No.: 2000-SMTS-xxP

Specifications

- Electrical
- Voltage Rating: 100V AC, DC
- Current Rating: 2A
- Withstanding Voltage: 500V AC/ minute.
- Insulation Resistance: 1000M Ω Min
- Contact Resistance: 20m Ω Max
- Mates with: 2000-H-xxP

Material

- Circuits: 2~16
- Housing: LCP, UL 94V-0
- Pin: Phosphor bronze, Tin plated
- Fitting: Brass, Tin plated
- Temperature Range: -25~+85°C

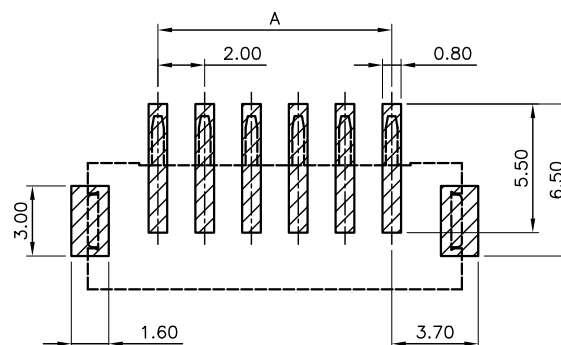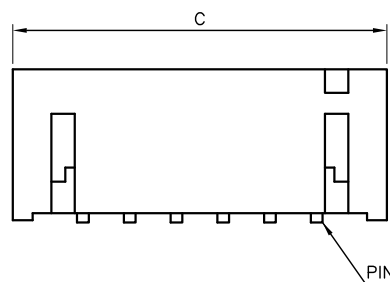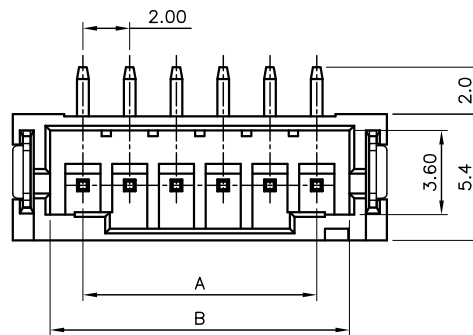

PCB PATTREN LAYOUT

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION		
		A	B	C
2	2000-SMTS-02P	2.00	4.80	8.0
3	2000-SMTS-03P	4.00	6.80	10.0
4	2000-SMTS-04P	6.00	8.80	12.0
5	2000-SMTS-05P	8.00	10.80	14.0
6	2000-SMTS-06P	10.00	12.80	16.0
7	2000-SMTS-07P	12.00	14.80	18.0
8	2000-SMTS-08P	14.00	16.80	20.0
9	2000-SMTS-09P	16.00	18.80	22.0

CIRCUITS	PART NO.	DIMENSION		
		A	B	C
10	2000-SMTS-10P	18.00	20.80	24.0
11	2000-SMTS-11P	20.00	22.80	26.0
12	2000-SMTS-12P	22.00	24.80	28.0
13	2000-SMTS-13P	24.00	26.80	30.0
14	2000-SMTS-14P	26.00	28.80	32.0
15	2000-SMTS-15P	28.00	30.80	34.0
16	2000-SMTS-16P	30.00	32.80	36.0

2.0mm .079" Center Wire to Board Connector



2000 Series

■ WAFER





- Part No.: 2000-SMTR-xxP

Specifications

- Electrical
- Voltage Rating: 100V AC, DC
- Current Rating: 2A
- Withstanding Voltage: 500V AC/ minute.
- Insulation Resistance: 1000M Ω Min
- Contact Resistance: 20m Ω Max
- Mates with: 2000-H-xxP

Material

- Circuits: 2~16
- Housing: LCP, UL 94V-0
- Pin: Brass, Tin plated
- Fitting: Brass, Tin plated
- Temperature Range: -25~+85°C

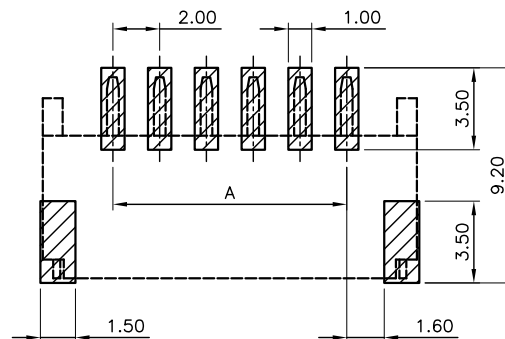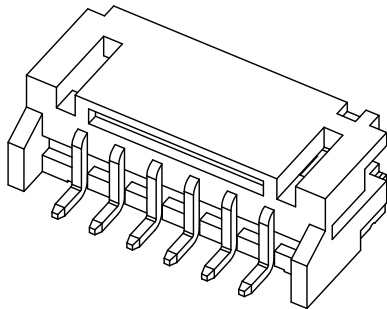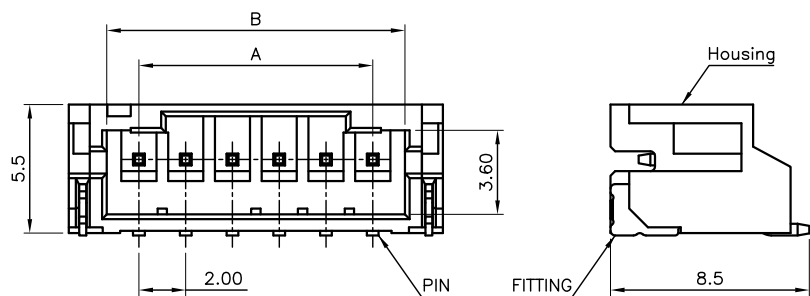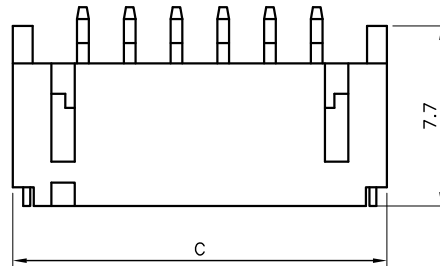

PCB PATTREN LAYOUT

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION		
		A	B	C
2	2000-SMTR-02P	2.00	4.75	8.0
3	2000-SMTR-03P	4.00	6.75	10.0
4	2000-SMTR-04P	6.00	8.75	12.0
5	2000-SMTR-05P	8.00	10.75	14.0
6	2000-SMTR-06P	10.00	12.75	16.0
7	2000-SMTR-07P	12.00	14.75	18.0
8	2000-SMTR-08P	14.00	16.75	20.0
9	2000-SMTR-09P	16.00	18.75	22.0

CIRCUITS	PART NO.	DIMENSION		
		A	B	C
10	2000-SMTR-10P	18.00	20.75	24.0
11	2000-SMTR-11P	20.00	22.75	26.0
12	2000-SMTR-12P	22.00	24.75	28.0
13	2000-SMTR-13P	24.00	26.75	30.0
14	2000-SMTR-14P	26.00	28.75	32.0
15	2000-SMTR-15P	28.00	30.75	34.0
16	2000-SMTR-16P	30.00	32.75	36.0