

2.0mm .079" Center Wire to Board Connector



2008 Series

■ WAFER






- Part No.: 2008-SMTR-xxP

Specifications

- Electrical
- Voltage Rating: 200V AC, DC
- Current Rating: 3A (AWG#26)
- Withstanding Voltage: 500V AC/ minute.
- Insulation Resistance: 100M Ω Min
- Contact Resistance: 20m Ω Max
- Mates with: 2008-HL-xxP

Material

- Circuits: 3~16
- Housing: Nylon 6T, UL 94V-0
- Pin: Brass, Gold plated
- Fitting: Brass, Gold plated
- Temperature Range: -25~+85°C

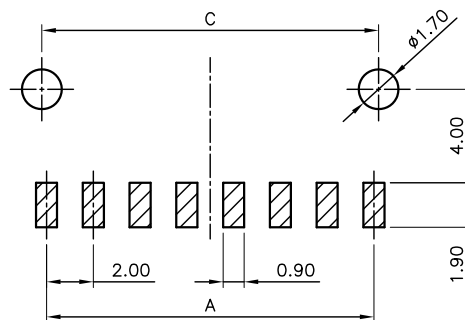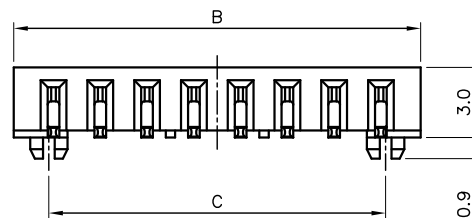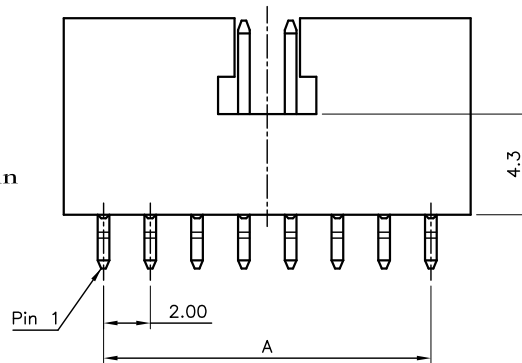

PCB PATTREN LAYOUT

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION		
		A	B	C
3	2008-SMTR-03P	4.00	7.40	4.40
4	2008-SMTR-04P	6.00	9.40	6.40
5	2008-SMTR-05P	8.00	11.40	8.40
6	2008-SMTR-06P	10.00	13.40	10.40
7	2008-SMTR-07P	12.00	15.40	12.40
8	2008-SMTR-08P	14.00	17.40	14.40
9	2008-SMTR-09P	16.00	19.40	16.40
10	2008-SMTR-10P	18.00	21.40	18.40

CIRCUITS	PART NO.	DIMENSION		
		A	B	C
11	2008-SMTR-11P	20.00	23.40	20.40
12	2008-SMTR-12P	22.00	25.40	22.40
13	2008-SMTR-13P	24.00	27.40	24.40
14	2008-SMTR-14P	26.00	29.40	26.40
15	2008-SMTR-15P	28.00	31.40	28.40
16	2008-SMTR-16P	30.00	33.40	30.40