

2.0mm .079" Center Wire to Board Connector




2100 Series

■ WAFER

- Part No.: 2100-WS
- Material: Post: Brass, Gold Flash
Base: PBT+30%glass fiber,
UL94V-2, Black
- Pitch: 2.0mm (.079")
- Poles: 2~40(Single row)
- Mates with: 2100-H

■ SPECIFICATIONS

- Rated Voltage: 150V AC,DC
- Rated Current: 1A
- Withstand Voltage: 800V AC/minute
- Insulation Resistance: 1,000M Ohm min
- Temperature Range: -25~95°C
- Applicable P.C.B. Thickness: 0.8~1.6mm
- Applicable P.C.B. Hole dia.: $\phi 0.9\text{mm} \pm 0.05$

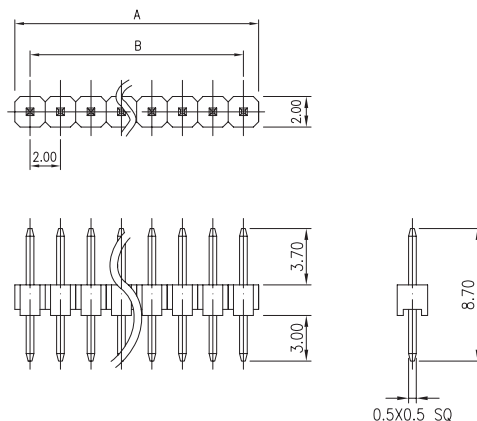

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	2100-WS-1X2P	4.0	2.0
3	2100-WS-1X3P	6.0	4.0
4	2100-WS-1X4P	8.0	6.0
5	2100-WS-1X5P	10.0	8.0
6	2100-WS-1X6P	12.0	10.0
7	2100-WS-1X7P	14.0	12.0
8	2100-WS-1X8P	16.0	14.0
9	2100-WS-1X9P	18.0	16.0
10	2100-WS-1X10P	20.0	18.0
11	2100-WS-1X11P	22.0	20.0
12	2100-WS-1X12P	24.0	22.0

CIRCUITS	PART NO.	DIMENSION	
		A	B
13	2100-WS-1X13P	26.0	24.0
14	2100-WS-1X14P	28.0	26.0
15	2100-WS-1X15P	30.0	28.0
16	2100-WS-1X16P	32.0	30.0
17	2100-WS-1X17P	34.0	32.0
18	2100-WS-1X18P	36.0	34.0
19	2100-WS-1X19P	38.0	36.0
20	2100-WS-1X20P	40.0	38.0
21	2100-WS-1X21P	42.0	40.0
22	2100-WS-1X22P	44.0	42.0
23	2100-WS-1X23P	46.0	44.0


2100 Series

■ WAFER

- Part No.: 2100-WR
- Material: Post: Brass, Gold Flash
Base: PBT+30%glass fiber,
UL94V-2, Black
- Pitch: 2.0mm (.079")
- Poles: 2~40(Single row)
- Mates with: 2100-H

■ SPECIFICATIONS

- Rated Voltage: 150V AC,DC
- Rated Current: 1A
- Withstand Voltage: 800V AC/minute
- Insulation Resistance: 1,000M Ohm min
- Temperature Range: -25~95°C
- Applicable P.C.B. Thickness: 0.8~1.6mm
- Applicable P.C.B. Hole dia.: $\phi 0.9\text{mm} \pm 0.05$

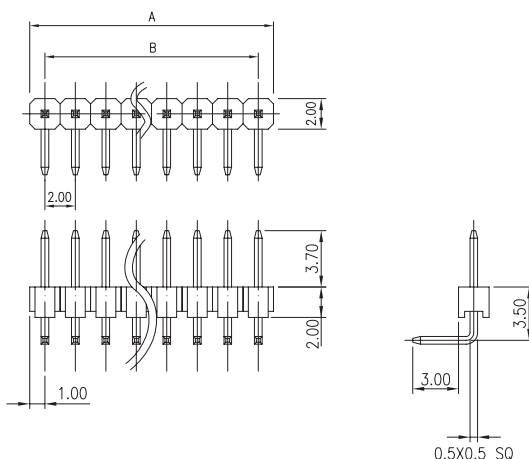

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	2100-WR-1X2P	4.0	2.0
3	2100-WR-1X3P	6.0	4.0
4	2100-WR-1X4P	8.0	6.0
5	2100-WR-1X5P	10.0	8.0
6	2100-WR-1X6P	12.0	10.0
7	2100-WR-1X7P	14.0	12.0
8	2100-WR-1X8P	16.0	14.0
9	2100-WR-1X9P	18.0	16.0
10	2100-WR-1X10P	20.0	18.0
11	2100-WR-1X11P	22.0	20.0
12	2100-WR-1X12P	24.0	22.0

CIRCUITS	PART NO.	DIMENSION	
		A	B
13	2100-WR-1X13P	26.0	24.0
14	2100-WR-1X14P	28.0	26.0
15	2100-WR-1X15P	30.0	28.0
16	2100-WR-1X16P	32.0	30.0
17	2100-WR-1X17P	34.0	32.0
18	2100-WR-1X18P	36.0	34.0
19	2100-WR-1X19P	38.0	36.0
20	2100-WR-1X20P	40.0	38.0
21	2100-WR-1X21P	42.0	40.0
22	2100-WR-1X22P	44.0	42.0
23	2100-WR-1X23P	46.0	44.0

2.0mm .079" Center Wire to Board Connector




2100 Series

■ WAFER

- Part No.: 2100-WS
- Material: Post: Brass, Gold Flash
Base: PBT+30%glass fiber,
UL94V-2, Black
- Pitch: 2.0mm (.079")
- Poles: 4~80(Double row)
- Mates with: 2100-H

■ SPECIFICATIONS

- Rated Voltage: 150V AC,DC
- Rated Current: 1A
- Withstand Voltage: 800V AC/minute
- Insulation Resistance: 1,000M Ohm min
- Temperature Range: -25~95°C
- Applicable P.C.B. Thickness: 0.8~1.6mm
- Applicable P.C.B. Hole dia.: $\phi 0.9\text{mm} \pm 0.05$

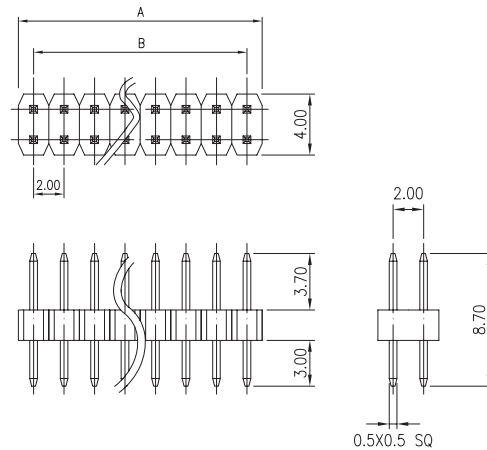

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
4	2100-WS-2X2P	4.0	2.0
6	2100-WS-2X3P	6.0	4.0
8	2100-WS-2X4P	8.0	6.0
10	2100-WS-2X5P	10.0	8.0
12	2100-WS-2X6P	12.0	10.0
14	2100-WS-2X7P	14.0	12.0
16	2100-WS-2X8P	16.0	14.0
18	2100-WS-2X9P	18.0	16.0
20	2100-WS-2X10P	20.0	18.0
22	2100-WS-2X11P	22.0	20.0
24	2100-WS-2X12P	24.0	22.0

CIRCUITS	PART NO.	DIMENSION	
		A	B
26	2100-WS-2X13P	26.0	24.0
28	2100-WS-2X14P	28.0	26.0
30	2100-WS-2X15P	30.0	28.0
32	2100-WS-2X16P	32.0	30.0
34	2100-WS-2X17P	34.0	32.0
36	2100-WS-2X18P	36.0	34.0
38	2100-WS-2X19P	38.0	36.0
40	2100-WS-2X20P	40.0	38.0
42	2100-WS-2X21P	42.0	40.0
44	2100-WS-2X22P	44.0	42.0
46	2100-WS-2X23P	46.0	44.0


2100 Series

■ WAFER

- Part No.: 2100-WR
- Material: Post: Brass, Gold Flash
Base: PBT+30%glass fiber,
UL94V-2, Black
- Pitch: 2.0mm (.079")
- Poles: 4~80(Double row)
- Mates with: 2100-H

■ SPECIFICATIONS

- Rated Voltage: 150V AC,DC
- Rated Current: 1A
- Withstand Voltage: 800V AC/minute
- Insulation Resistance: 1,000M Ohm min
- Temperature Range: -25~95°C
- Applicable P.C.B. Thickness: 0.8~1.6mm
- Applicable P.C.B. Hole dia.: $\phi 0.9\text{mm} \pm 0.05$

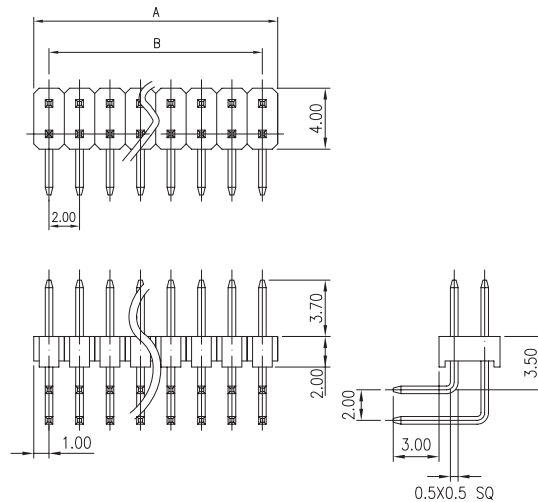

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
4	2100-WR-2X2P	4.0	2.0
6	2100-WR-2X3P	6.0	4.0
8	2100-WR-2X4P	8.0	6.0
10	2100-WR-2X5P	10.0	8.0
12	2100-WR-2X6P	12.0	10.0
14	2100-WR-2X7P	14.0	12.0
16	2100-WR-2X8P	16.0	14.0
18	2100-WR-2X9P	18.0	16.0
20	2100-WR-2X10P	20.0	18.0
22	2100-WR-2X11P	22.0	20.0
24	2100-WR-2X12P	24.0	22.0

CIRCUITS	PART NO.	DIMENSION	
		A	B
26	2100-WR-2X13P	26.0	24.0
28	2100-WR-2X14P	28.0	26.0
30	2100-WR-2X15P	30.0	28.0
32	2100-WR-2X16P	32.0	30.0
34	2100-WR-2X17P	34.0	32.0
36	2100-WR-2X18P	36.0	34.0
38	2100-WR-2X19P	38.0	36.0
40	2100-WR-2X20P	40.0	38.0
42	2100-WR-2X21P	42.0	40.0
44	2100-WR-2X22P	44.0	42.0
46	2100-WR-2X23P	46.0	44.0