

2.0mm .079" Center Wire to Board Connector



2300 Series

■ WAFER




- Part No.: 2300-WS-2×xxP

Specifications



- Electrical
- Voltage Rating: 100V AC,DC
- Current Rating: 1A
- Withstanding Voltage: 800V AC/ minute
- Insulation Resistance: 1000MΩ Min
- Mates with: 2300-H-2×xxP

Material

- Circuits: 4~32
- Housing: PBT, UL 94V-0
- Pin: Brass, Tin plated
- Temperature Range: -25~+95°C

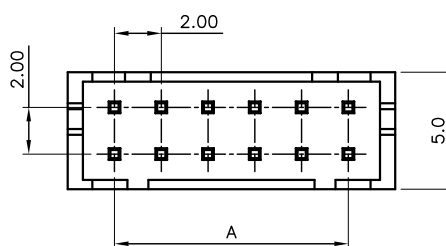

PCB PATTERN LAYOUT

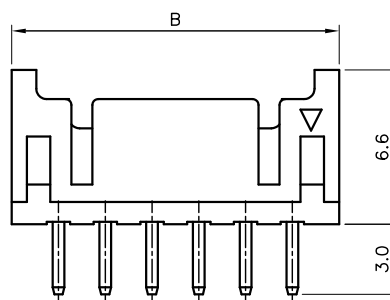

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
4	2300-WS-2×2P	2.00	6.0
6	2300-WS-2×3P	4.00	8.0
8	2300-WS-2×4P	6.00	10.0
10	2300-WS-2×5P	8.00	12.0
12	2300-WS-2×6P	10.00	14.0
14	2300-WS-2×7P	12.00	16.0
16	2300-WS-2×8P	14.00	18.0
18	2300-WS-2×9P	16.00	20.0

CIRCUITS	PART NO.	DIMENSION	
		A	B
20	2300-WS-2×10P	18.00	22.0
22	2300-WS-2×11P	20.00	24.0
24	2300-WS-2×12P	22.00	26.0
26	2300-WS-2×13P	24.00	28.0
28	2300-WS-2×14P	26.00	30.0
30	2300-WS-2×15P	28.00	32.0
32	2300-WS-2×16P	30.00	34.0

2300 Series

■ WAFER




- Part No.: 2300-WR-2×xxP

Specifications



- Electrical
- Voltage Rating: 100V AC,DC
- Current Rating: 1A
- Withstanding Voltage: 800V AC/ minute
- Insulation Resistance: 1000MΩ Min
- Mates with: 2300-H-2×xxP

Material

- Circuits: 4~32
- Housing: PBT, UL 94V-0
- Pin: Brass, Tin plated
- Temperature Range: -25~+95°C

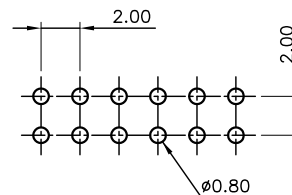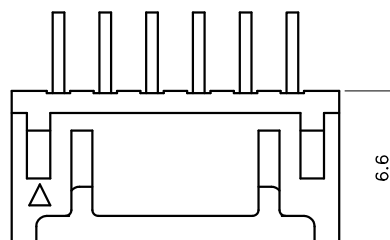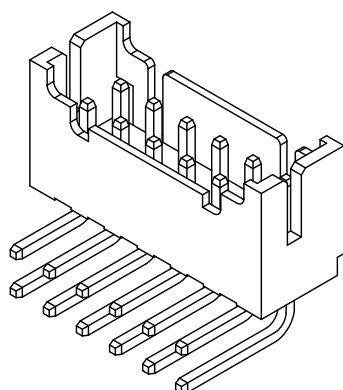

PCB PATTERN LAYOUT

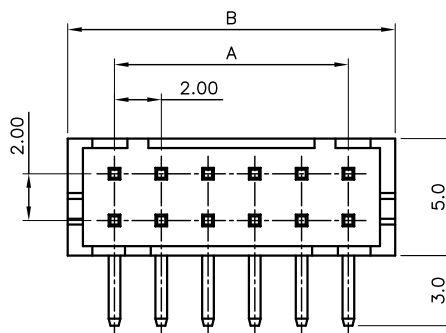

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
4	2300-WR-2×2P	2.00	6.0
6	2300-WR-2×3P	4.00	8.0
8	2300-WR-2×4P	6.00	10.0
10	2300-WR-2×5P	8.00	12.0
12	2300-WR-2×6P	10.00	14.0
14	2300-WR-2×7P	12.00	16.0
16	2300-WR-2×8P	14.00	18.0
18	2300-WR-2×9P	16.00	20.0

CIRCUITS	PART NO.	DIMENSION	
		A	B
20	2300-WR-2×10P	18.00	22.0
22	2300-WR-2×11P	20.00	24.0
24	2300-WR-2×12P	22.00	26.0
26	2300-WR-2×13P	24.00	28.0
28	2300-WR-2×14P	26.00	30.0
30	2300-WR-2×15P	28.00	32.0
32	2300-WR-2×16P	30.00	34.0