

# 2.0mm .079" Center Wire to Board Connector



## 2400 Series

### ■ WAFER




- Part No.: 2400-WS-xxP

### Specifications



- Electrical
- Voltage Rating: 100V AC,DC
- Current Rating: 1A
- Withstanding Voltage: 800V AC/ minute
- Insulation Resistance: 1,000M $\Omega$  Min
- Mates with: 2400-H-xxP

### Material

- Circuits: 2~15
- Housing: Nylon 66, UL 94V-2
- Pin: Brass, Tin plated
- Temperature Range: -25~+95°C

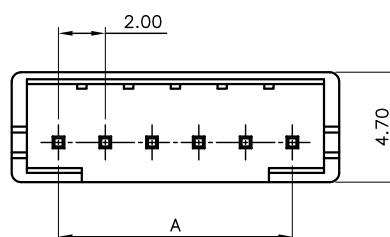

PCB PATTERN LAYOUT

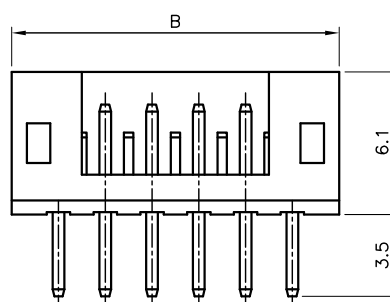

### Ordering Information and Dimensions

| CIRCUITS | PART NO.    | DIMENSION |      |
|----------|-------------|-----------|------|
|          |             | A         | B    |
| 2        | 2400-WS-02P | 2.00      | 6.0  |
| 3        | 2400-WS-03P | 4.00      | 8.0  |
| 4        | 2400-WS-04P | 6.00      | 10.0 |
| 5        | 2400-WS-05P | 8.00      | 12.0 |
| 6        | 2400-WS-06P | 10.00     | 14.0 |
| 7        | 2400-WS-07P | 12.00     | 16.0 |
| 8        | 2400-WS-08P | 14.00     | 18.0 |

| CIRCUITS | PART NO.    | DIMENSION |      |
|----------|-------------|-----------|------|
|          |             | A         | B    |
| 9        | 2400-WS-09P | 18.00     | 22.0 |
| 10       | 2400-WS-10P | 20.00     | 24.0 |
| 11       | 2400-WS-11P | 22.00     | 26.0 |
| 12       | 2400-WS-12P | 24.00     | 28.0 |
| 13       | 2400-WS-13P | 26.00     | 30.0 |
| 14       | 2400-WS-14P | 28.00     | 32.0 |
| 15       | 2400-WS-15P | 30.00     | 34.0 |

## 2400 Series

### ■ WAFER




- Part No.: 2400-WR-xxP

### Specifications



- Electrical
- Voltage Rating: 100V AC,DC
- Current Rating: 1A
- Withstanding Voltage: 800V AC/ minute
- Insulation Resistance: 1,000M $\Omega$  Min
- Mates with: 2400-H-xxP

### Material

- Circuits: 2~15
- Housing: Nylon 66, UL 94V-2
- Pin: Brass, Tin plated
- Temperature Range: -25~+95°C

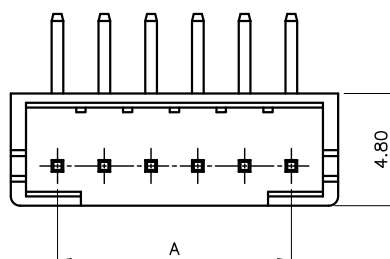

PCB PATTERN LAYOUT



### Ordering Information and Dimensions

| CIRCUITS | PART NO.    | DIMENSION |      |
|----------|-------------|-----------|------|
|          |             | A         | B    |
| 2        | 2400-WR-02P | 2.00      | 6.0  |
| 3        | 2400-WR-03P | 4.00      | 8.0  |
| 4        | 2400-WR-04P | 6.00      | 10.0 |
| 5        | 2400-WR-05P | 8.00      | 12.0 |
| 6        | 2400-WR-06P | 10.00     | 14.0 |
| 7        | 2400-WR-07P | 12.00     | 16.0 |
| 8        | 2400-WR-08P | 14.00     | 18.0 |

| CIRCUITS | PART NO.    | DIMENSION |      |
|----------|-------------|-----------|------|
|          |             | A         | B    |
| 9        | 2400-WR-09P | 18.00     | 22.0 |
| 10       | 2400-WR-10P | 20.00     | 24.0 |
| 11       | 2400-WR-11P | 22.00     | 26.0 |
| 12       | 2400-WR-12P | 24.00     | 28.0 |
| 13       | 2400-WR-13P | 26.00     | 30.0 |
| 14       | 2400-WR-14P | 28.00     | 32.0 |
| 15       | 2400-WR-15P | 30.00     | 34.0 |