

2.50mm .098" Center Wire to Board Connector









2500 Series

■ TERMINAL

• Part No.: 2500-T-T-S

- Material: Brass
- Thickness: 0.20mm
- Plating: Tin plated
- Applicable Wire: AWG#24~28
- Insulation O.D: 1.75mm (Max)
- Q'TY : 8,000 pcs/ reel
- Accepts housing: 2500-H-xxP

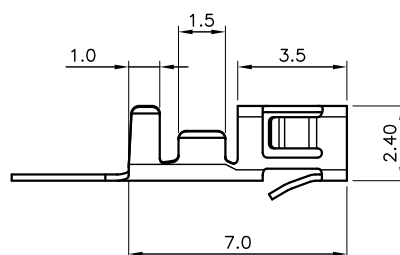

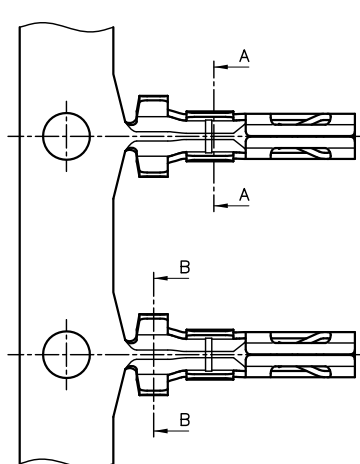



2500 Series

■ HOUSING

• Part No.: 2500-H-xxP

- Material: Nylon 66, UL 94V-2
- Pitch: 2.5mm (.098")
- Circuits: 2~20
- Q'TY : 1,000 pcs/ bag
- Accepts terminal: 2500-T-T-S

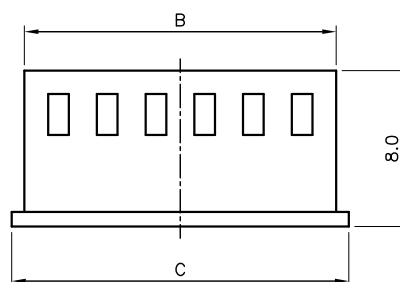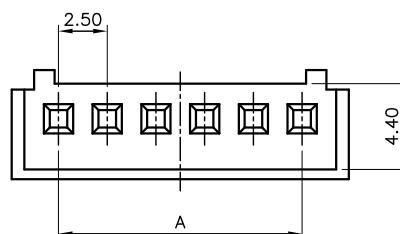

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION		
		A	B	C
2	2500-H-02P	2.50	6.0	7.3
3	2500-H-03P	5.00	8.5	9.8
4	2500-H-04P	7.50	11.0	12.3
5	2500-H-05P	10.00	13.5	14.8
6	2500-H-06P	12.50	16.0	17.3
7	2500-H-07P	15.00	18.5	19.8
8	2500-H-08P	17.50	21.0	22.3
9	2500-H-09P	20.00	23.5	24.8
10	2500-H-10P	22.50	26.0	27.3
11	2500-H-11P	25.00	28.5	29.8

CIRCUITS	PART NO.	DIMENSION		
		A	B	C
12	2500-H-12P	27.50	31.0	32.3
13	2500-H-13P	30.00	33.5	34.8
14	2500-H-14P	32.50	36.0	37.3
15	2500-H-15P	35.00	38.5	39.8
16	2500-H-16P	37.50	41.0	42.3
17	2500-H-17P	40.00	43.5	44.8
18	2500-H-18P	42.50	46.0	47.3
19	2500-H-19P	45.00	48.5	49.8
20	2500-H-20P	47.50	51.0	52.3