

2.54mm .100" Center Wire to Board Connector



2510 Series

■ WAFER




- Part No.: 2510-WS-xxP

Specifications



- Electrical
- Voltage Rating: 250V AC,DC
- Current Rating: 2.5A
- Withstanding Voltage: 1,000V AC/ minute
- Insulation Resistance: 1000M Ω Min
- Mates with: 2510-H-xxP

Material

- Circuits: 2~20
- Housing: Nylon 66, UL 94V-2
- Pin: Brass, Tin plated
- Temperature Range: -25~+85°C

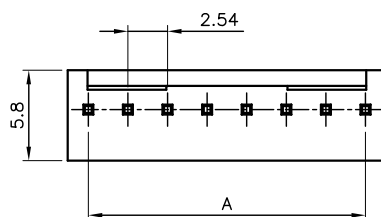

PCB PATTREN LAYOUT



Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	2510-WS-02P	2.54	5.18
3	2510-WS-03P	5.08	7.72
4	2510-WS-04P	7.62	10.26
5	2510-WS-05P	10.16	12.80
6	2510-WS-06P	12.70	15.34
7	2510-WS-07P	15.24	17.88
8	2510-WS-08P	17.78	20.42
9	2510-WS-09P	20.32	22.96
10	2510-WS-10P	22.86	25.50
11	2510-WS-11P	25.40	28.04

CIRCUITS	PART NO.	DIMENSION	
		A	B
12	2510-WS-12P	27.94	30.58
13	2510-WS-13P	30.48	33.12
14	2510-WS-14P	33.02	35.66
15	2510-WS-15P	35.56	38.20
16	2510-WS-16P	38.10	40.74
17	2510-WS-17P	40.64	43.28
18	2510-WS-18P	43.18	45.82
19	2510-WS-19P	45.72	48.36
20	2510-WS-20P	48.26	50.90

2510 Series

■ WAFER




- Part No.: 2510-WR-xxP

Specifications



- Electrical
- Voltage Rating: 250V AC,DC
- Current Rating: 2.5A
- Withstanding Voltage: 1,000V AC/ minute
- Insulation Resistance: 1000M Ω Min
- Mates with: 2510-H-xxP

Material

- Circuits: 2~20
- Housing: Nylon 66, UL 94V-2
- Pin: Brass, Tin plated
- Temperature Range: -25~+85°C

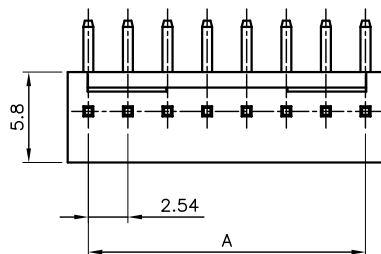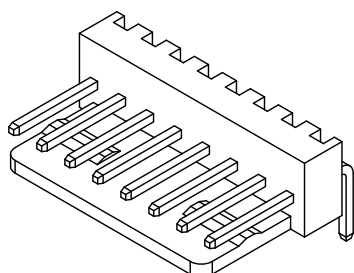

PCB PATTREN LAYOUT



Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	2510-WR-02P	2.54	5.18
3	2510-WR-03P	5.08	7.72
4	2510-WR-04P	7.62	10.26
5	2510-WR-05P	10.16	12.80
6	2510-WR-06P	12.70	15.34
7	2510-WR-07P	15.24	17.88
8	2510-WR-08P	17.78	20.42
9	2510-WR-09P	20.32	22.96
10	2510-WR-10P	22.86	25.50
11	2510-WR-11P	25.40	28.04

CIRCUITS	PART NO.	DIMENSION	
		A	B
12	2510-WR-12P	27.94	30.58
13	2510-WR-13P	30.48	33.12
14	2510-WR-14P	33.02	35.66
15	2510-WR-15P	35.56	38.20
16	2510-WR-16P	38.10	40.74
17	2510-WR-17P	40.64	43.28
18	2510-WR-18P	43.18	45.82
19	2510-WR-19P	45.72	48.36
20	2510-WR-20P	48.26	50.90