

2.50mm .098" Center Wire to Board Connector



2530 Series

■ WAFER




- Part No.: 2530-WS-xxP

Specifications

- Electrical
- Voltage Rating: 250V AC,DC
- Current Rating: 2A
- Withstanding Voltage: 800V AC/ minute
- Insulation Resistance: 1,000M Ω Min
- Mates with: 2530-H-xxP

Material

- Circuits: 2~15
- Housing: Nylon 66, UL 94V-2
- Pin: Brass, Tin plated
- Temperature Range: -25~+85°C

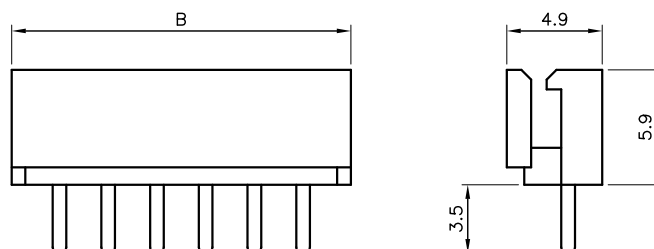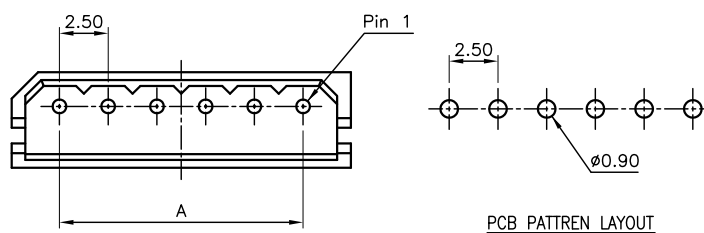

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	2530-WS-02P	2.50	7.40
3	2530-WS-03P	5.00	9.90
4	2530-WS-04P	7.50	12.40
5	2530-WS-05P	10.00	14.90
6	2530-WS-06P	12.50	17.40
7	2530-WS-07P	15.00	19.90
8	2530-WS-08P	17.50	22.40

CIRCUITS	PART NO.	DIMENSION	
		A	B
9	2530-WS-09P	20.00	24.90
10	2530-WS-10P	22.50	27.40
11	2530-WS-11P	25.00	29.90
12	2530-WS-12P	27.50	32.40
13	2530-WS-13P	30.00	34.90
14	2530-WS-14P	32.50	37.40
15	2530-WS-15P	35.00	39.90

2530 Series

■ WAFER




- Part No.: 2530-WR-xxP

Specifications

- Electrical
- Voltage Rating: 250V AC,DC
- Current Rating: 2A
- Withstanding Voltage: 800V AC/ minute
- Insulation Resistance: 1,000M Ω Min
- Mates with: 2530-H-xxP

Material

- Circuits: 2~15
- Housing: Nylon 66, UL 94V-2
- Pin: Brass, Tin plated
- Temperature Range: -25~+85°C

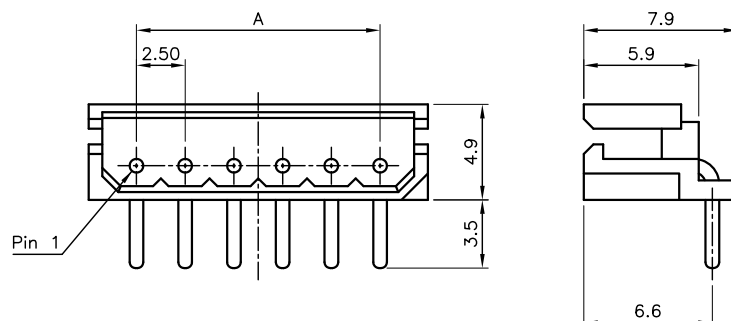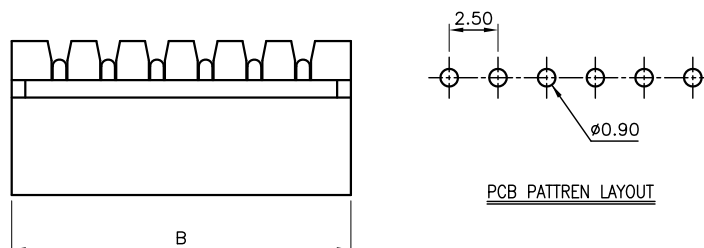

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	2530-WR-02P	2.50	7.40
3	2530-WR-03P	5.00	9.90
4	2530-WR-04P	7.50	12.40
5	2530-WR-05P	10.00	14.90
6	2530-WR-06P	12.50	17.40
7	2530-WR-07P	15.00	19.90
8	2530-WR-08P	17.50	22.40

CIRCUITS	PART NO.	DIMENSION	
		A	B
9	2530-WR-09P	20.00	24.90
10	2530-WR-10P	22.50	27.40
11	2530-WR-11P	25.00	29.90
12	2530-WR-12P	27.50	32.40
13	2530-WR-13P	30.00	34.90
14	2530-WR-14P	32.50	37.40
15	2530-WR-15P	35.00	39.90