

2.5mm .098" Center Wire to Board Connector




2550 Series

■ WAFER

- Part No.: 2550-WS
- Material: Post: Brass, Tin/Plated
Base: Nylon 66, UL94V-2
- Pitch: 2.5mm (.098")
- Poles: 2~20
- Mates with: 2550-H

■ SPECIFICATIONS

- Rated Voltage: 250V AC,DC
- Rated Current: 2A
- Withstand Voltage: 1,000V AC/minute
- Insulation Resistance: 1,000M Ohm min
- Temperature Range: -25~85°C
- Applicable P.C.B. Thickness: 1.6mm
- Applicable P.C.B. Hole dia.: $\phi 0.9\text{mm} \pm 0.05$

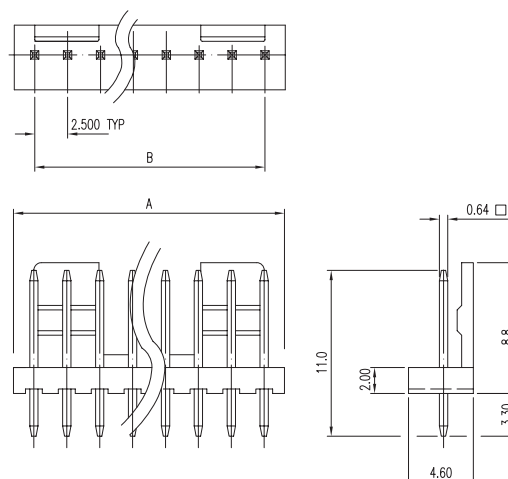

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	2550-WS-02P	5.0	2.5
3	2550-WS-03P	7.5	5.0
4	2550-WS-04P	10.0	7.5
5	2550-WS-05P	12.5	10.0
6	2550-WS-06P	15.0	12.5
7	2550-WS-07P	17.5	15.0
8	2550-WS-08P	20.0	17.5
9	2550-WS-09P	22.5	20.0
10	2550-WS-10P	25.0	22.5
11	2550-WS-11P	27.5	25.0

CIRCUITS	PART NO.	DIMENSION	
		A	B
12	2550-WS-12P	30.0	27.5
13	2550-WS-13P	32.5	30.0
14	2550-WS-14P	35.0	32.5
15	2550-WS-15P	37.5	35.0
16	2550-WS-16P	40.0	37.5
17	2550-WS-17P	42.5	40.0
18	2550-WS-18P	45.0	42.5
19	2550-WS-19P	47.5	45.0
20	2550-WS-20P	50.0	47.5


2550 Series

■ WAFER

- Part No.: 2550-WR
- Material: Post: Brass, Tin/Plated
Base: Nylon 66, UL94V-2
- Pitch: 2.5mm (.098")
- Poles: 2~20
- Mates with: 2550-H

■ SPECIFICATIONS

- Rated Voltage: 250V AC,DC
- Rated Current: 2A
- Withstand Voltage: 1,000V AC/minute
- Insulation Resistance: 1,000M Ohm min
- Temperature Range: -25~85°C
- Applicable P.C.B. Thickness: 1.6mm
- Applicable P.C.B. Hole dia.: $\phi 0.9\text{mm} \pm 0.05$

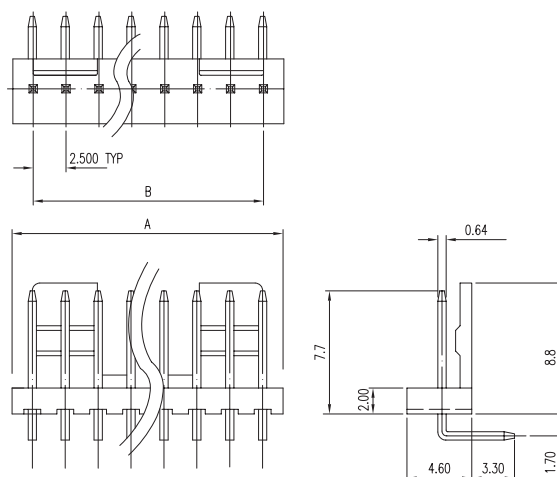

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	2550-WR-02P	5.0	2.5
3	2550-WR-03P	7.5	5.0
4	2550-WR-04P	10.0	7.5
5	2550-WR-05P	12.5	10.0
6	2550-WR-06P	15.0	12.5
7	2550-WR-07P	17.5	15.0
8	2550-WR-08P	20.0	17.5
9	2550-WR-09P	22.5	20.0
10	2550-WR-10P	25.0	22.5
11	2550-WR-11P	27.5	25.0

CIRCUITS	PART NO.	DIMENSION	
		A	B
12	2550-WR-12P	30.0	27.5
13	2550-WR-13P	32.5	30.0
14	2550-WR-14P	35.0	32.5
15	2550-WR-15P	37.5	35.0
16	2550-WR-16P	40.0	37.5
17	2550-WR-17P	42.5	40.0
18	2550-WR-18P	45.0	42.5
19	2550-WR-19P	47.5	45.0
20	2550-WR-20P	50.0	47.5