

5.08mm .200" Center Disk Drive Power Connector






3027 Series

■ WAFER

- Part No.: 3027-WS
- Material: Post: Brass, Tin/Plated
Base: Nylon 66, UL94V-2
- Pitch: 5.08mm (.200")
- Poles: 4
- Mates with: 3022-H, 3024-H

■ SPECIFICATIONS

- Rated Voltage: 250V AC,DC
- Rated Current: 6A
- Withstand Voltage: 1,500V AC/minute
- Insulation Resistance: 1,000M Ohm min
- Temperature Range: -25~120°C
- Applicable P.C.B. Thickness: 1.6mm
- Applicable P.C.B. Hole dia.: $\phi 0.9\text{mm} \pm 0.05$

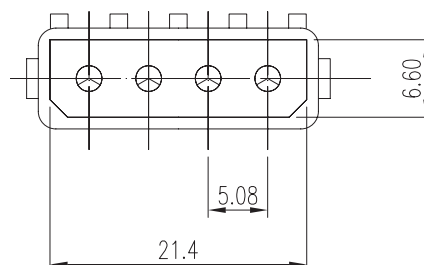

3027 Series

■ WAFER

- Part No.: 3027-WR
- Material: Post: Brass, Tin/Plated
Base: Nylon 66, UL94V-2
- Pitch: 5.08mm (.200")
- Poles: 4
- Mates with: 3022-H, 3024-H

■ SPECIFICATIONS

- Rated Voltage: 250V AC,DC
- Rated Current: 6A
- Withstand Voltage: 1,500V AC/minute
- Insulation Resistance: 1,000M Ohm min
- Temperature Range: -25~120°C
- Applicable P.C.B. Thickness: 1.6mm
- Applicable P.C.B. Hole dia.: $\phi 0.9\text{mm} \pm 0.05$

