

2.54mm .100" Center Wire to Board Connector



3040 Series

■ WAFER




- Part No.: 3040-WS-xxP

Specifications



- Electrical
- Voltage Rating: 250V AC,DC
- Current Rating: 2A
- Withstanding Voltage: 1,000V AC/ minute
- Insulation Resistance: 1000M Ω Min
- Mates with: 3040-H-xxP

Material

- Circuits: 3, 4
- Housing: Nylon 66, UL 94V-2
- Pin: Brass, Tin plated
- Temperature Range: -25~+85°C



PCB PATTREN LAYOUT

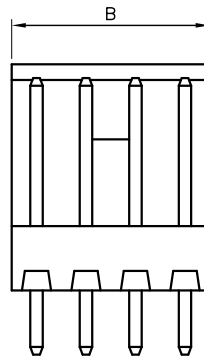

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
3	3040-WS-03P	5.08	7.62
4	3040-WS-04P	7.62	10.16

3040 Series

■ WAFER




- Part No.: 3040-WR-xxP

Specifications



- Electrical
- Voltage Rating: 250V AC,DC
- Current Rating: 2A
- Withstanding Voltage: 1,000V AC/ minute
- Insulation Resistance: 1000M Ω Min
- Mates with: 3040-H-xxP

Material

- Circuits: 3, 4
- Housing: Nylon 66, UL 94V-2
- Pin: Brass, Tin plated
- Temperature Range: -25~+85°C



PCB PATTREN LAYOUT



Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
3	3040-WR-03P	5.08	7.62
4	3040-WR-04P	7.62	10.16