

2.50mm .098" Center Wire to Board Connector



5011 Series

■ WAFER



- Part No.: 5011-WS-xxP

Specifications

- Electrical
- Voltage Rating: 250V AC,DC
- Current Rating: 3A
- Withstanding Voltage: 1,000V AC/ minute
- Insulation Resistance: 1,000M Ω Min
- Mates with: 5011-H-xxP

Material

- Circuits: 2~16
- Housing: Nylon 66, UL 94V-2
- Pin: Brass, Tin plated
- Temperature Range: -25~+85°C

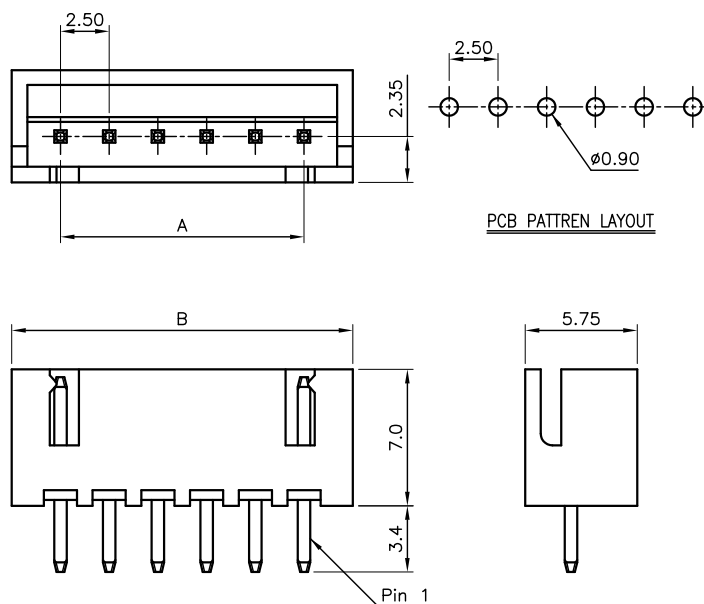

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	5011-WS-02P	2.50	7.50
3	5011-WS-03P	5.00	10.00
4	5011-WS-04P	7.50	12.50
5	5011-WS-05P	10.00	15.00
6	5011-WS-06P	12.50	17.50
7	5011-WS-07P	15.00	20.00
8	5011-WS-08P	17.50	22.50
9	5011-WS-09P	20.00	25.00

CIRCUITS	PART NO.	DIMENSION	
		A	B
10	5011-WS-10P	22.50	27.50
11	5011-WS-11P	25.00	30.00
12	5011-WS-12P	27.50	32.50
13	5011-WS-13P	30.00	35.00
14	5011-WS-14P	32.50	37.50
15	5011-WS-15P	35.00	40.00
16	5011-WS-16P	37.50	42.50

5011 Series

■ WAFER



- Part No.: 5011-WR-xxP

Specifications

- Electrical
- Voltage Rating: 250V AC,DC
- Current Rating: 3A
- Withstanding Voltage: 1,000V AC/ minute
- Insulation Resistance: 1,000M Ω Min
- Mates with: 5011-H-xxP

Material

- Circuits: 2~16
- Housing: Nylon 66, UL 94V-2
- Pin: Brass, Tin plated
- Temperature Range: -25~+85°C

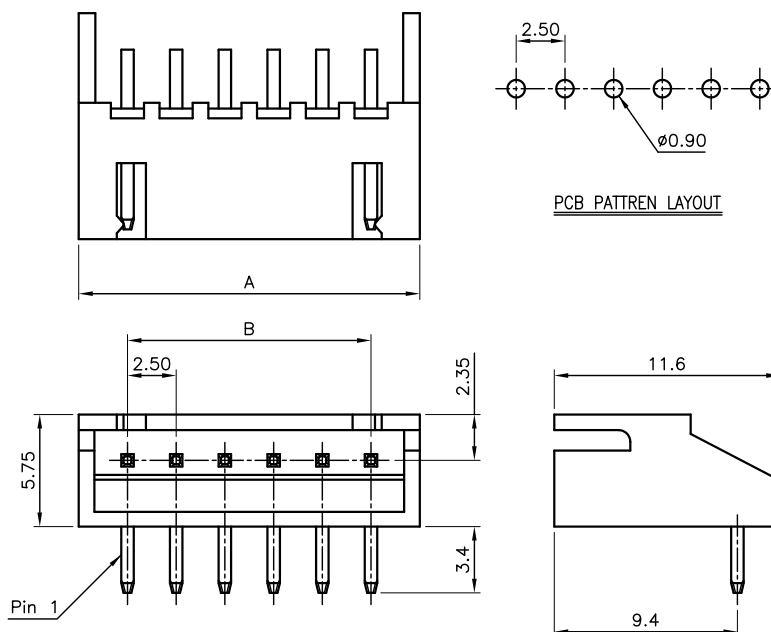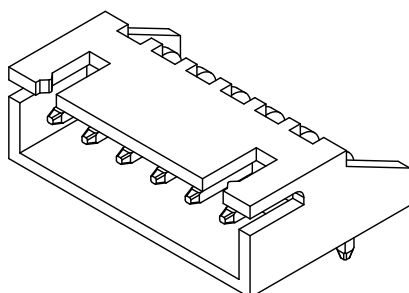

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	5011-WR-02P	2.50	7.50
3	5011-WR-03P	5.00	10.00
4	5011-WR-04P	7.50	12.50
5	5011-WR-05P	10.00	15.00
6	5011-WR-06P	12.50	17.50
7	5011-WR-07P	15.00	20.00
8	5011-WR-08P	17.50	22.50
9	5011-WR-09P	20.00	25.00

CIRCUITS	PART NO.	DIMENSION	
		A	B
10	5011-WR-10P	22.50	27.50
11	5011-WR-11P	25.00	30.00
12	5011-WR-12P	27.50	32.50
13	5011-WR-13P	30.00	35.00
14	5011-WR-14P	32.50	37.50
15	5011-WR-15P	35.00	40.00
16	5011-WR-16P	37.50	42.50