

3.96mm .156" Center Wire to Board Connector



6100 Series

■ WAFER






• Part No.: 6100-WS-xxP

Specifications

- Electrical
- Voltage Rating: 250V AC,DC
- Current Rating: 7A
- Withstanding Voltage: 1,500V AC/ minute
- Insulation Resistance: 1000M Ω Min
- Mates with: 6100-H-xxP

Material

- Circuits: 2~12
- Housing: Nylon 66, UL 94V-2
- Pin: Brass, Tin plated
- Temperature Range: -25~+120°C

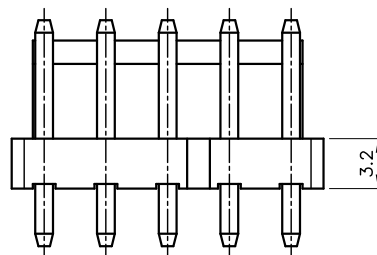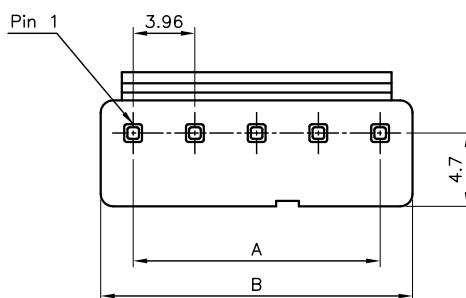

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	6100-WS-02P	3.96	8.12
3	6100-WS-03P	7.92	12.08
4	6100-WS-04P	11.88	16.04
5	6100-WS-05P	15.84	20.00
6	6100-WS-06P	19.80	23.96
7	6100-WS-07P	23.76	27.92

CIRCUITS	PART NO.	DIMENSION	
		A	B
8	6100-WS-08P	27.72	31.88
9	6100-WS-09P	31.68	35.84
10	6100-WS-10P	35.64	39.80
11	6100-WS-11P	39.60	43.76
12	6100-WS-12P	43.56	47.72

6100 Series

■ WAFER






• Part No.: 6100-WR-xxP

Specifications

- Electrical
- Voltage Rating: 250V AC,DC
- Current Rating: 7A
- Withstanding Voltage: 1,500V AC/ minute
- Insulation Resistance: 1000M Ω Min
- Mates with: 6100-H-xxP

Material

- Circuits: 2~12
- Housing: Nylon 66, UL 94V-2
- Pin: Brass, Tin plated
- Temperature Range: -25~+120°C

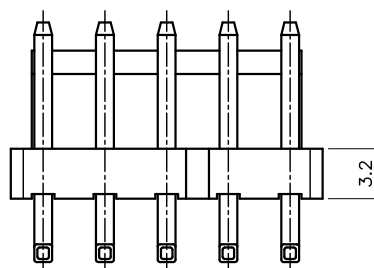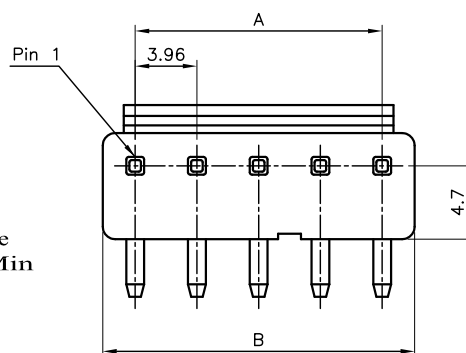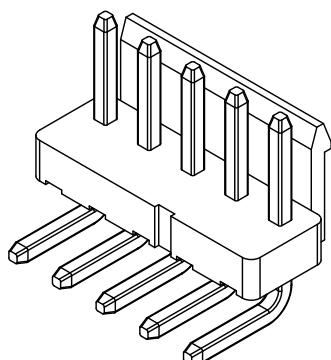

Ordering Information and Dimensions

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	6100-WR-02P	3.96	8.12
3	6100-WR-03P	7.92	12.08
4	6100-WR-04P	11.88	16.04
5	6100-WR-05P	15.84	20.00
6	6100-WR-06P	19.80	23.96
7	6100-WR-07P	23.76	27.92

CIRCUITS	PART NO.	DIMENSION	
		A	B
8	6100-WR-08P	27.72	31.88
9	6100-WR-09P	31.68	35.84
10	6100-WR-10P	35.64	39.80
11	6100-WR-11P	39.60	43.76
12	6100-WR-12P	43.56	47.72