

0.50mm .020" Center FPC/ FFC Connector



F051001 Series

■ FPC/ FFC



- Part No.: F051001-xxP-G

Specifications




- Electrical
- Voltage Rating: 25V AC/ DC
- Current Rating: 0.5A
- Temperature Range: -25~+85°C

Material

- Housing: Thermal Plastic, UL 94V-0
- Cover: Thermal Plastic, UL 94V-0
- Terminal: Copper Alloy, Gold plated
- Fitting: Copper Alloy, Gold plated

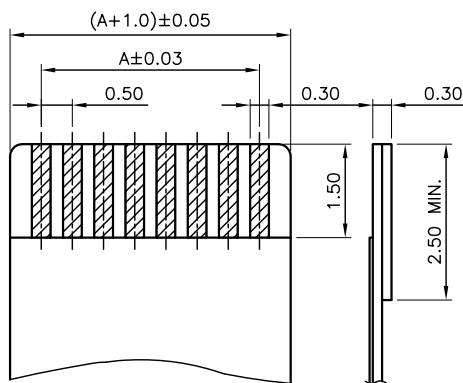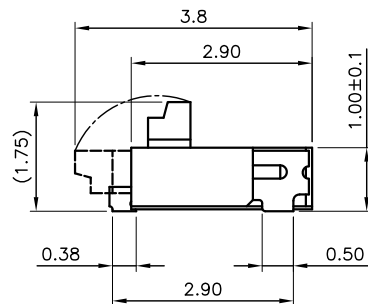

APPLICABLE FPC/ FFC

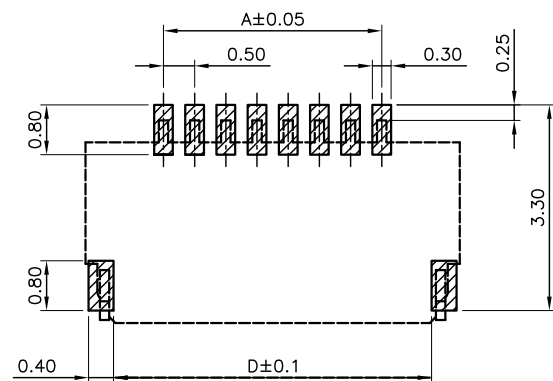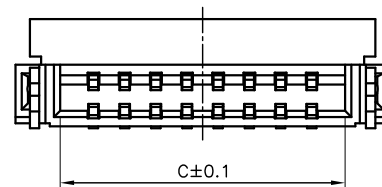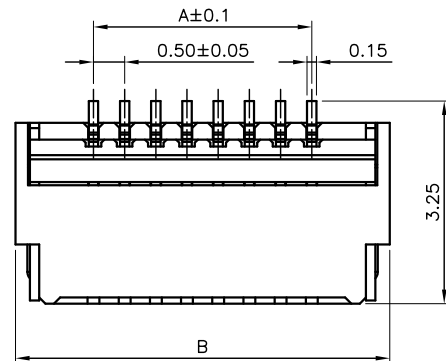

PCB PATTREN LAYOUT

Ordering Information and Dimensions

PART NO.	DIMENSION			
	A	B	C	D
F051001-04P-G	1.50	4.00	2.57	3.10
F051001-06P-G	2.50	5.00	3.57	4.10
F051001-07P-G	3.00	5.50	4.07	4.60
F051001-08P-G	3.50	6.00	4.57	5.10
F051001-10P-G	4.50	7.00	5.57	6.10
F051001-11P-G	5.00	7.50	6.07	6.60
F051001-12P-G	5.50	8.00	6.57	7.10
F051001-14P-G	6.50	9.00	7.57	8.10
F051001-16P-G	7.50	10.00	8.57	9.10
F051001-20P-G	9.50	12.00	10.57	11.10

PART NO.	DIMENSION			
	A	B	C	D
F051001-22P-G	10.50	13.00	11.57	12.10
F051001-23P-G	11.00	13.50	12.07	12.60
F051001-24P-G	11.50	14.00	12.57	13.10
F051001-26P-G	12.50	15.00	13.57	14.10
F051001-30P-G	14.50	17.00	15.57	16.10
F051001-32P-G	15.50	18.00	16.57	17.10
F051001-34P-G	16.50	19.00	17.57	18.10
F051001-40P-G	19.50	22.00	20.57	21.10
F051001-45P-G	22.00	24.50	23.07	23.60
F051001-50P-G	24.50	27.00	25.57	26.10